WET TYPE MAGNETIC SEPARATOR

Application

1.For primary rough dressings and refused tails,increasing recovery rate and reducing the load of the second stage grinding.

2.For concentration of ferromagnetic minerals increasing ore grades and recovery rates.

3.Used before a High Magnetism Separator to remove ferromagnetic minerals from ore and prevent magnetic clogging.

4.Removing iron from non-magnetic minerals or materials.

5.Recovering iron from river and sea sand.
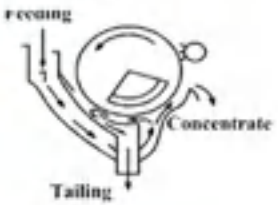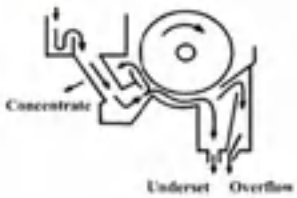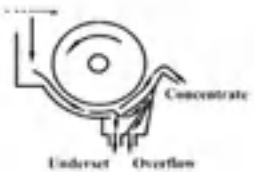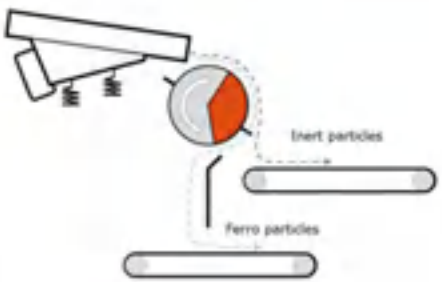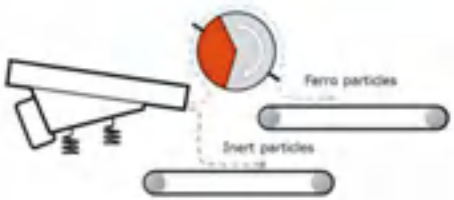
6.Removing iron from wet slurry.