SUSPENSION MAGNETIC SEPARATOR

Permanent Overband Magnets

overband separators are renowned around the world as the most effective units for the continuous removal of tramp ferrous material from a product stream.

This type of magnetic separator is used to protect, clean and separate materials on applications in the recycling and quarrying industries. Most commonly used on mobile crushing machinery, overbelt magnets are self-cleaning, so that no manual cleaning is required and downtime for the end user is reduced to a minimum.

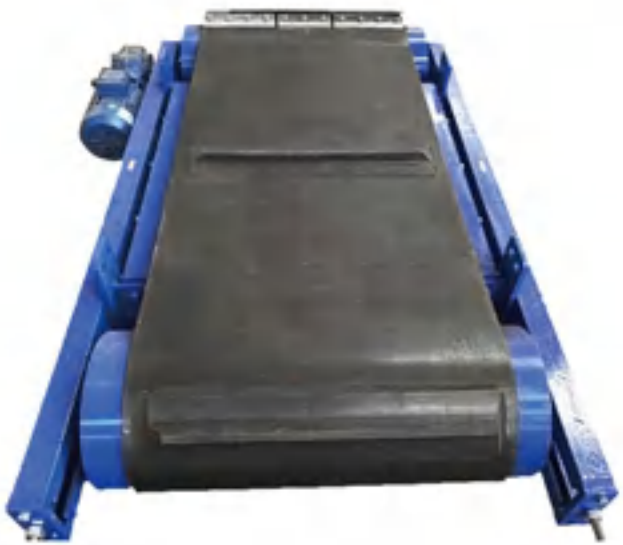

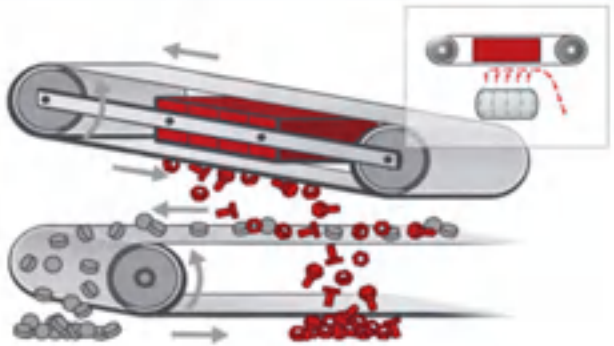

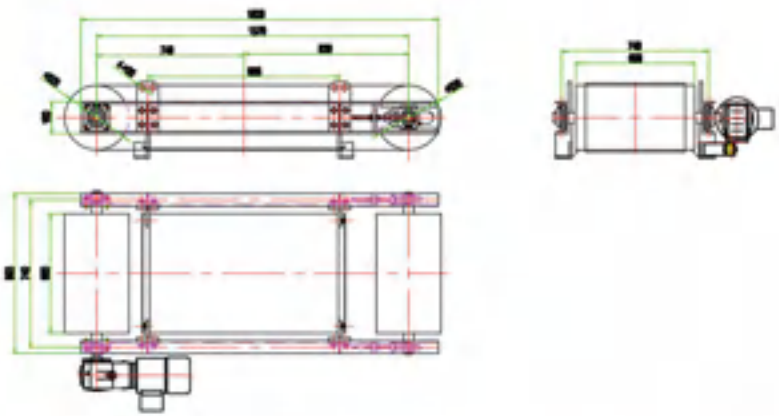

Item	Belt Width	Suspension Height	Magnetic Intensity	Motor Power	Dimensuon mm			Weight
	mm	mm	Gs	kw	L	W	H	KG
RCYD-z6	650	200	≥450	2.2	2245	1447	380	820
RCYD-z8	800	250	≥450	2.2	2645	1447	440	980
RCYD-z10	1000	250	≥450	3.0	2875	1473	440	1220
RCYD-z12	1200	250	≥450	3.0	3065	1473	440	2050
RCYD-z14	1400	250	≥450	4.0	3285	1473	500	2890
RCYD-z16	1600	250	≥450	4.0	3485	1473	500	3250