



PERMANENT MAGNETIC PULLEY

Permanent Overband Magnets

overband separators are renowned around the world as the most effective units for the continuous removal of tramp ferrous material from a product stream.

This type of magnetic separator is used to protect, clean and separate materials on applications in the recycling and quarrying industries. Most commonly used on mobile crushing machinery, overbelt magnets are self-cleaning, so that no manual cleaning is required and downtime for the end user is reduced to a minimum.

Densen Magnetic Equipment Magnetics Pulleys would supply you more magnets of what you want for greater attracting power and holding power, keeping harmful, dangerous ferrous particles out of your processing system or redeem valuable ferrites from other substances.

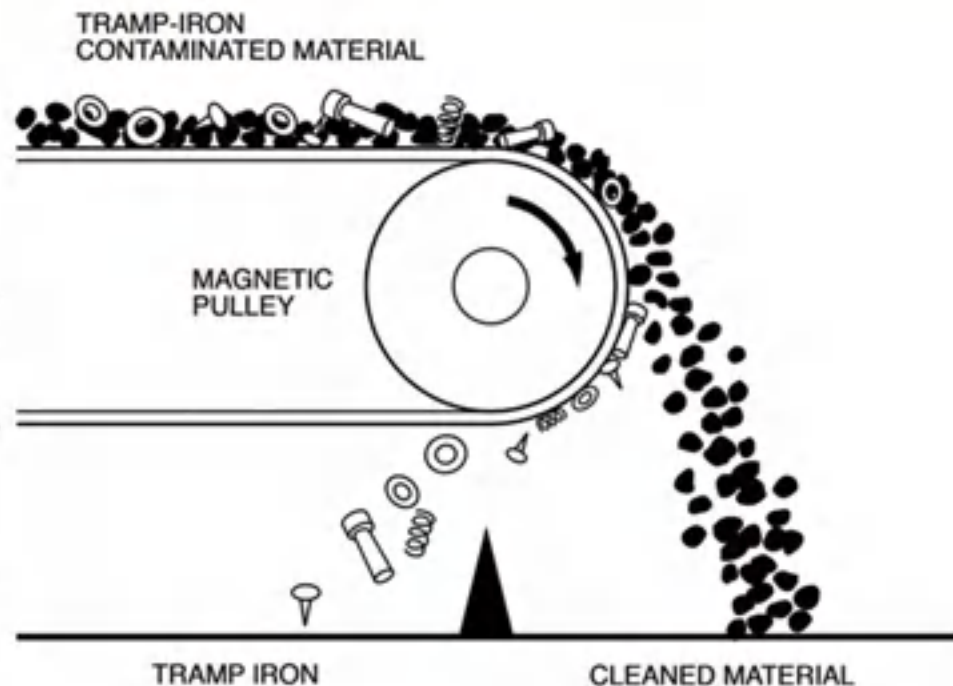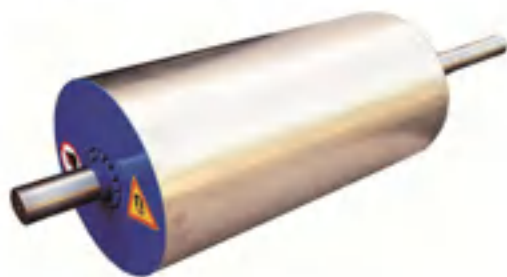

Model No.	Drum specification		Suitable Belt width mm	Magnetic intensity Gs	Bearing type	Allowable Torques KN.m		Weight kg
	Diameter(m) m	Length(mm)				Smooth surface	Rubber surface	
CT56	500	600	500	simple 1500-2500 special 2500-4500	1312	1.63	2.5	380
CT57	500	750	650		1316	2.12	3.26	580
CT59	500	950	800		1316	2.62	4.01	765
CT66	630	600	500		1316	3.67	5.61	750
CT67	630	750	650		1316	2.96	4.54	800
CT89	630	950	800		22220	3.67	5.61	1090
CT811	630	1150	1000		22220	4.57	7.01	1285
CT89	800	950	800		22220	5.59	8.55	1480
CT811	800	1150	1000		22224	6.96	10.68	1965