SUSPENSION BELT TYPE MAGNETIC SEPARATOR

Permanent Overband Magnets

overband separators are renowned around the world as the most effective units for the continuous removal of tramp ferrous material from a product stream.

This type of magnetic separator is used to protect, clean and separate materials on applications in the recycling and quarrying industries. Most commonly used on mobile crushing machinery, overbelt magnets are self-cleaning, so that no manual cleaning is required and downtime for the end user is reduced to a minimum.

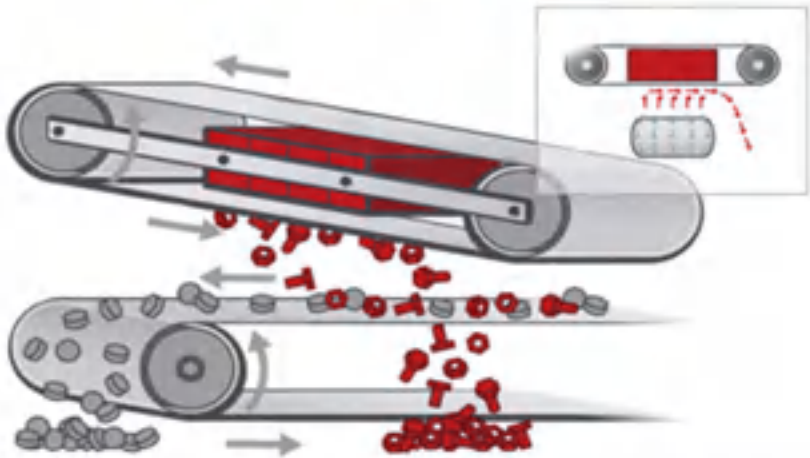

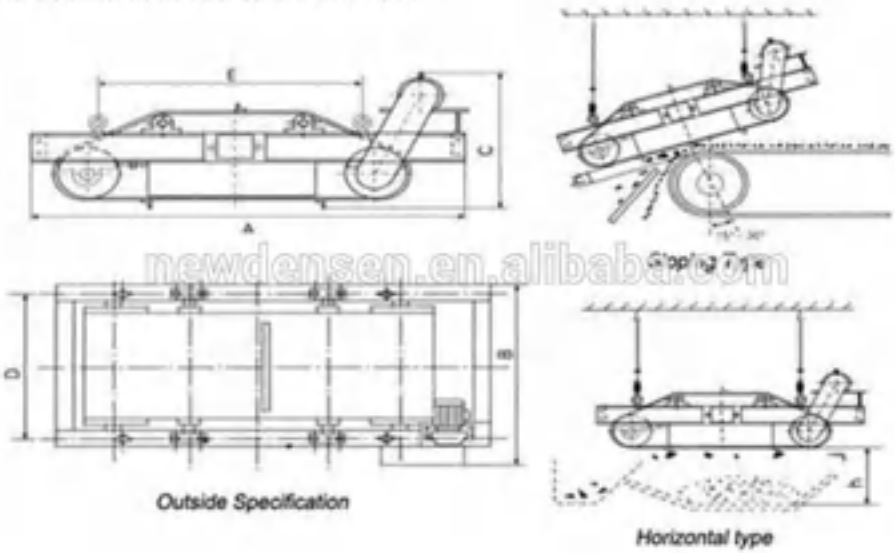

newdensen.en.alibaba.com

Item	Belt Width	Suspension Height	Magnetic Intensity	Motor Power	Dimensuon mm			Weight
	mm	mm	Gs	kw	L	W	H	KG
RCYD-5	500	150	≥700	1.5	1980	910	732	715
RCYD-6	650	200	≥700	1.5	2250	1060	732	890
RCYD-8	800	250	≥700	2.2	2350	1260	732	1295
RCYD-10	1000	300	≥700	3.0	2720	1480	813	1680
RCYD-12	1200	350	≥700	4.0	2920	1720	878	2325
RCYD-14	1400	400	≥700	4.0	3120	1920	878	3150
RCYD-16	1600	450	≥700	5.5	3290	2120	878	3530
RCYD-18	1800	500	≥700	7.5	3570	2435	985	5850
RCYD-20	2000	550	≥700	7.5	3590	2630	1022	6710